

Mechanical Characteristics

Number of cells (pcs)	144
Size of cell (mm)	156.75*78.375
Type of cell	Poly
Thickness of glass (mm)	3.2
Type of frame	Anodized aluminum alloy
Junction box	IP67
Size of module (mm)	1992*990*40
Weight (kg)	22.6
Cables/connectors	4mm ² MC4 compatible



Maximum Ratings

Operating Temperature(°C)	-40~85
Operating Humidity(%)	5~85
Allowable Hail Load	25mm ice-ball with velocity of 23m/s

Packing Configuration

Pieces per pallet	26
Size of packing (mm)	2024*1120*1140
Weight of packing (kg)	638
Pieces per container	572
Size of container	40' HC

I-V Curves

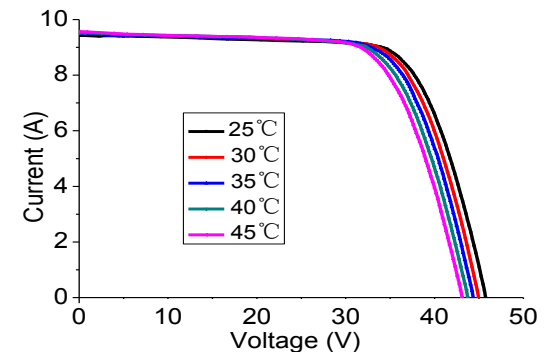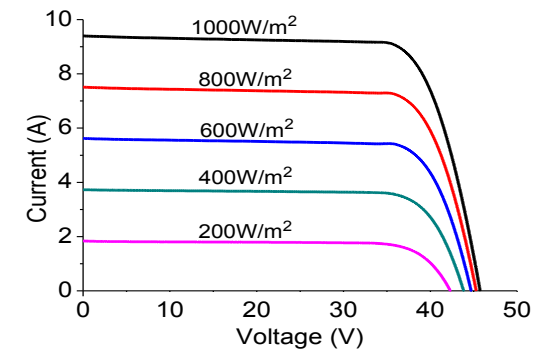

Electrical Characteristics

STC	EG-340 P72-HCV	EG-345 P72-HCV	EG-350 P72-HCV	EG-355 P72-HCV	EG-360 P72-HCV
Pmax (W)	340	345	350	355	360
Vmp (V)	38.21	38.51	38.76	39.02	39.22
Imp (A)	8.90	8.96	9.03	9.10	9.18
Voc (V)	46.70	46.95	47.22	47.50	47.76
Isc (A)	9.39	9.45	9.53	9.61	9.70
Module efficiency (%)	17.24	17.49	17.74	18.00	18.25
Maximum system voltage (V)	1500				
Fuse Rating Current (A)	15				
Power tolerance (%)	0~+3				
Temperature coefficient	Pmax (%/°C)	-0.405			
	Isc (%/°C)	0.041			
	Voc (%/°C)	-0.298			

STC: Irradiance 1000W/m², module temperature 25°C, AM=1.5

NOCT	EG-340 P72-HCV	EG-345 P72-HCV	EG-350 P72-HCV	EG-355 P72-HCV	EG-360 P72-HCV
Pmax (W)	252	256	260	264	268
Vmp (V)	34.96	35.22	35.43	35.68	35.93
Imp (A)	7.21	7.27	7.34	7.40	7.46
Voc (V)	42.87	43.08	43.27	43.52	43.77
Isc (A)	7.61	7.67	7.74	7.80	7.86
Power tolerance (%)	±3%				

NOCT: Irradiance 800W/ m², ambient temperature 20°C, wind speed 1m/s



Specifications in this catalog sheet are subject to technical changes and product innovations. EGING PV reserves the right of final interpretation.