

Mechanical Characteristics

Number of cells (pcs)	120
Size of cell (mm)	156.75*78.375
Type of cell	Poly
Thickness of glass (mm)	3.2
Type of frame	Anodized aluminum alloy
Junction box	IP68 (1m, 1h)
Size of module (mm)	1674*990*35/1664*984*35
Weight (kg)	18.8 / 17.5
Cables/connectors	H1Z2Z2-K 4mm ² 01C1/05-8 /TL-Cable01S/ Staubli MC4





Maximum Ratings

Operating Temperature(°C)	-40~85
Operating Humidity(%)	5~85
Allowable Hail Load	25mm ice-ball with velocity of 23m/s

Packing Configuration

Pieces per pallet	30
Size of packing (mm)	1714*1120*1140
Weight of packing (kg)	609
Pieces per container	780
Size of container	40' HC

I-V Curves

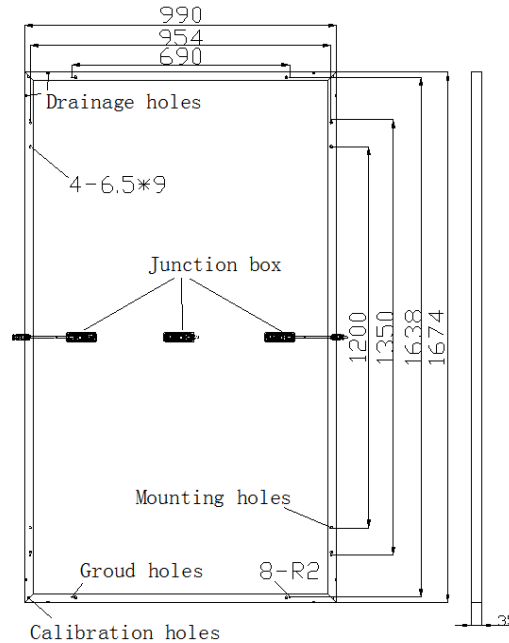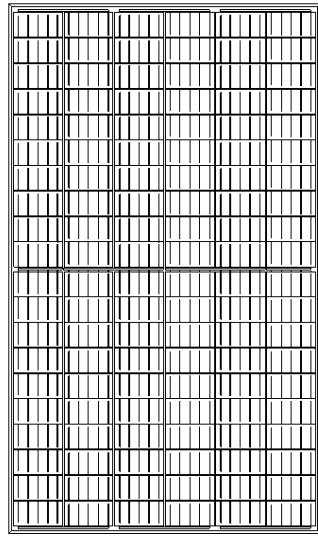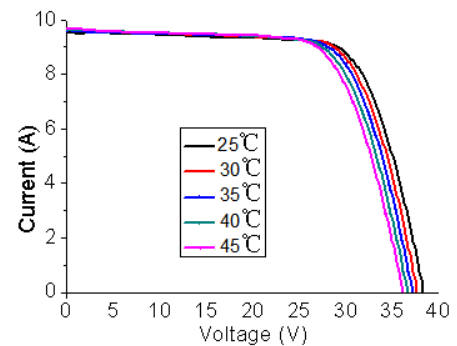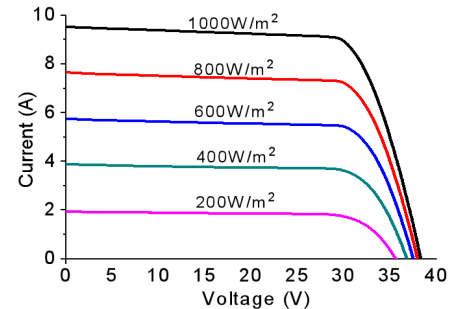

Electrical Characteristics

STC	EG-275 P60-HC			
Pmax (W)	275			
Vmp (V)	31.69			
Imp (A)	8.68			
Voc (V)	38.25			
Isc (A)	9.25			
Module efficiency (%)	16.59			
Maximum system voltage (V)		1000		
Fuse Rating Current (A)		15 / 20		
Tolerance (%)	Pmax: ±3% Binning; ±5W、Voc: ±5%、Isc: ±5%			
Temperature coefficient	Pmax (%/°C)	-0.405		
	Isc (%/°C)	0.041		
	Voc (%/°C)	-0.298		

STC: Irradiance 1000W/m², module temperature 25°C, AM=1.5

NOCT	EG-275 P60-HC			
Pmax (W)	204			
Vmp (V)	29.50			
Imp (A)	6.92			
Voc (V)	36.65			
Isc (A)	7.33			
Power tolerance	Pmax: ±3% Binning; ±5W			

NOCT: Irradiance 800W/ m², ambient temperature 20°C, wind speed 1m/s

Made In China
Changzhou EGing Photovoltaic Technology Co., Ltd



Specifications in this catalog sheet are subject to technical changes and product innovations. EGing PV reserves the right of final interpretation.