

## Mechanical Characteristics

Number of cells (pcs)	144
Size of cell (mm)	156.75*78.375
Type of cell	Mono
Thickness of glass (mm)	3.2
Type of frame	Anodized aluminum alloy
Junction box	IP68 (1m, 1h)
Size of module (mm)	1992*990*40
Weight (kg)	22.6 / 21.3
Cables/connectors	H1Z2Z2-K 4mm <sup>2</sup> .01C1/05-8 /TL-Cable01S / Staubli MC4


## Maximum Ratings

Operating Temperature(°C)	-40~85
Operating Humidity(%)	5~85
Allowable Hail Load	25mm ice-ball with velocity of 23m/s

## Packing Configuration

Pieces per pallet	26
Size of packing (mm)	2024*1120*1140
Weight of packing (kg)	638
Pieces per container	572
Size of container	40' HC

## I-V Curves

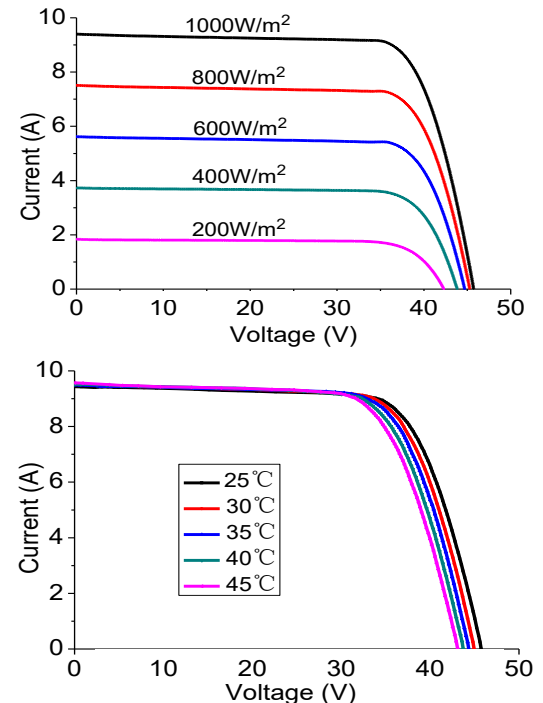

## Electrical Characteristics

STC	EG-370 M72-HC	EG-375 M72-HC	EG-380 M72-HC	EG-385 M72-HC	EG-390 M72-HC
Pmax (W)	370	375	380	385	390
Vmp (V)	39.32	39.56	39.75	39.94	40.13
Imp (A)	9.41	9.48	9.56	9.64	9.72
Voc (V)	47.50	47.77	47.98	48.30	48.50
Isc (A)	9.77	9.84	9.93	10.01	10.10
Module efficiency (%)	18.76	19.01	19.26	19.52	19.77
Maximum system voltage (V)	1000				
Fuse Rating Current (A)	15/20				
Tolerance (%)	Pmax: ±3% Binning; ±5W、Voc: ±5%、Isc: ±5%				
Temperature coefficient	Pmax (%/°C)	-0.390			
	Isc (%/°C)	0.039			
	Voc (%/°C)	-0.295			

STC: Irradiance 1000W/m<sup>2</sup>, module temperature 25°C, AM=1.5

NOCT	EG-370 M72-HC	EG-375 M72-HC	EG-380 M72-HC	EG-385 M72-HC	EG-390 M72-HC
Pmax (W)	274	278	282	286	289
Vmp (V)	36.40	36.68	36.92	37.15	37.26
Imp (A)	7.53	7.58	7.64	7.70	7.76
Voc (V)	44.10	44.40	44.60	44.83	45.02
Isc (A)	7.99	8.05	8.10	8.16	8.22
Power tolerance	Pmax: ±3% Binning; ±5W				

NOCT: Irradiance 800W/m<sup>2</sup>, ambient temperature 20°C, wind speed 1m/s

Made In China  
Changzhou EGING Photovoltaic Technology Co., Ltd



Specifications in this catalog sheet are subject to technical changes and product innovations. EGING PV reserves the right of final interpretation.