

STAR SERIES MONOCRYSTALLINE 108-cell MODULE

EG-405M54-HLV (black)

385~405W

0~3% POSITIVE TOLERANCE

KEY FEATURES



Mbb half cell design
Half-cut cells brings lower resistance and increased Multi Busbar reflectance ensures higher power output



More Power
Innovative 182mm big cell applied to ensure module power up to 405W



High Reliability
Strict in-house testing in PV Lab which is CNAS approved & TUV /VDE certified



Excellent Low-light Performance
Advanced solar cell surface texturing technology allows for excellent performance in low-light environments




Highly Strengthened Design
Certified to withstand:5400Pa snow load and 2400Pa wind load



PID Resistant
Excellent PID resistance performance optimized by unique structural design

LINEAR PERFORMANCE WARRANTY



15 15 Year Product Warranty **25** 25 Year Linear Power Warranty

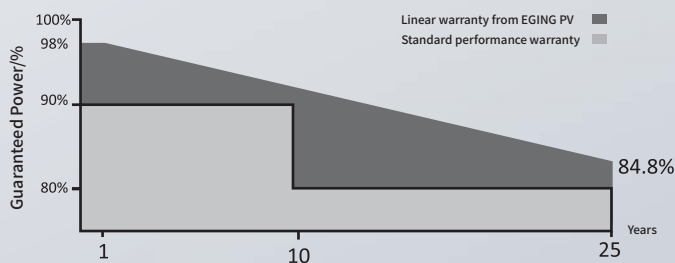



As a BloombergNEF Tier 1 and global leading manufacturer since 1998,EGING PV is committed to supplying reliable and durable PV products to customers to create together a greener planet.

EG-405M54-HLV (black)

Engineering Drawings

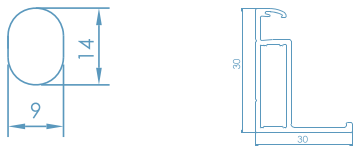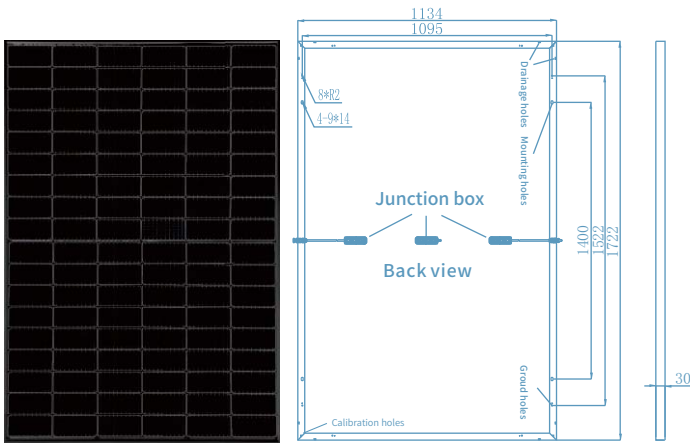

I-V Curves

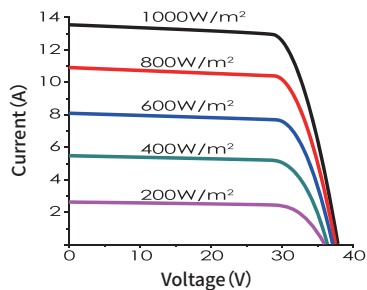

Packing Configuration

Pieces per pallet	36
Size of packing (mm)	1790*1140*1275
Weight of packing (kg)	772
Pieces per container	936
Size of container	40'HC

Electrical Characteristics

	385	390	395	400	405
Power level	385	390	395	400	405
Pmax (W)	385	390	395	400	405
Vmp (V)	30.32	30.57	30.82	31.04	31.25
Imp (A)	12.70	12.76	12.82	12.89	12.96
Voc (V)	36.27	36.52	36.77	36.99	37.21
Isc (A)	13.43	13.49	13.55	13.62	13.69
Module efficiency (%)	19.71	19.97	20.22	20.48	20.74
Maximum system voltage (V)	1500				
Fuse Rating (A)	25				
Temperature coefficient Pmax (%°C)	-0.350				
Temperature coefficient Isc (%°C)	0.05				
Temperature coefficient Voc (%°C)	-0.275				

STC:Irradiance 1000W/m²,module temperature 25°C,AM=1.5

Working Characteristics

	385	390	395	400	405
Power level	385	390	395	400	405
Pmax (W)	291	295	299	303	307
Vmp (V)	28.01	28.26	28.51	28.73	28.94
Imp (A)	10.39	10.44	10.49	10.55	10.61
Voc (V)	33.74	33.97	34.20	34.41	34.61
Isc (A)	10.99	11.04	11.09	11.15	11.20
Power tolerance (%)	0~+3				
NOCT (°C)	44±2				

NOCT:Conditions:Irradiance 800W/m²,ambient temperature 20°C, wind speed 1m/s

Mechanical Characteristics

Number of cells	108pcs
Size of cell (mm)	182*91
Type of cell	Mono
Thickness of glass (mm)	3.2
Type of frame	Anodized aluminum alloy
Junction box	IP68
Size of module (mm)	1722*1134*30
Weight (kg)	20.2
Cables/connectors	4mm ² , MC4 compatible
Length of Cabel	Portrait:+300mm/-300mm

Maximum Ratings

Operating Temperature(°C)	-40~85
Operating humidity(°C)	5~85
Allowable Hail Load	25mm ice-ball with velocity of 23m/s



Tel:86-519-82585880
 Zip:213213
 Add: No.18,Jinwu Road,Jintan Dist,
 Changzhou City,Jiangsu Province.
 Email:marketing@egingpv.com
 Web:www.egingpv.com

Revised in January 2022 1st Edition

CAUTION:All rights reserved by EGING PV.

Specifications included in this datasheet are subject to change without notice.