

# STAR SERIES MONO PERC 144-cell MODULE

## EG-555M72-HLV

### 535~555W

### KEY FEATURES



**Mbb cell design**  
Multi Busbar cells brings lower resistance and increased Busbar reflectance ensures higher power output



**Low degradation**  
All single crystal cells are produced by using gallium-doped silicon wafer, which has better anti-degradation ability and ensures durable and stable efficient power generation



**High Reliability**  
Strict in-house testing in PV Lab which is CNAS approved & TUV /VDE certified




**Excellent Low-light Performance**  
Advanced solar cell and glass surface texturing technology allows for excellent performance in low-light environments



### LINEAR PERFORMANCE WARRANTY


**15** 15 Year Product Warranty    **25** 25 Year Linear Power Warranty

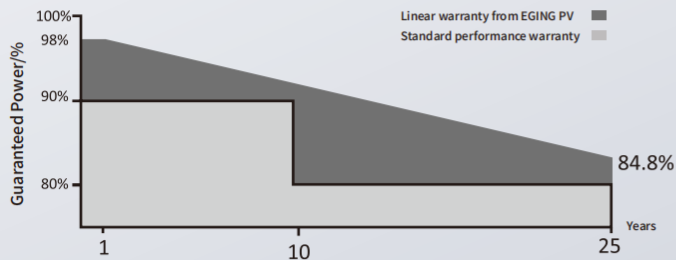



As a BloombergNEF Tier 1 and global leading manufacturer since 1998, EGING PV is committed to supplying reliable and durable PV products to customers to create together a greener planet.

# EG-555M72-HLV

## Engineering Drawings

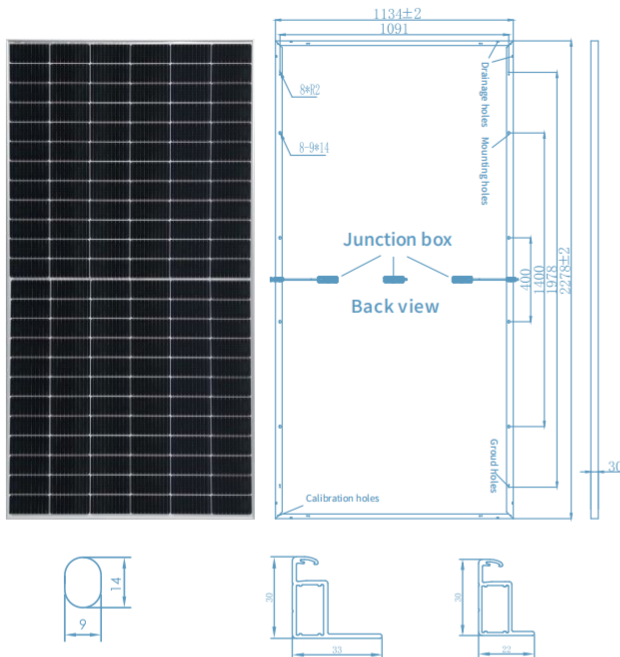

## I-V Curves

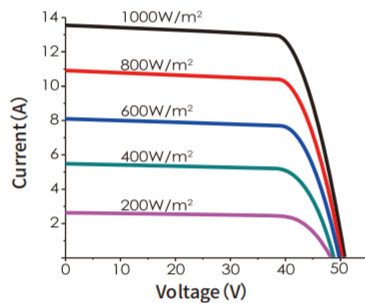

## Packing Configuration

Pieces per pallet	36
Size of packing (mm)	2320*1135*1255
Weight of packing (kg)	1022
Pieces per container	720
Size of container	40'HC

## Electrical Characteristics

Power level	535	540	545	550	555
Pmax (W)	535	540	545	550	555
Vmp (V)	41.80	42.03	42.25	42.48	42.70
Imp (A)	12.80	12.85	12.90	12.95	13.00
Voc (V)	49.76	49.89	50.10	50.32	50.54
Isc (A)	13.55	13.60	13.65	13.70	13.75
Module efficiency (%)	20.71	20.90	21.09	21.29	21.48
Maximum system voltage (V)	1500				
Fuse Rating (A)	25				
Temperature coefficient Pmax (%/°C)	-0.350				
Temperature coefficient Isc (%/°C)	0.05				
Temperature coefficient Voc (%/°C)	-0.275				

STC: Irradiance 1000W/m<sup>2</sup>, module temperature 25°C, AM=1.5

## Working Characteristics

Power level	535	540	545	550	555
Pmax (W)	405	409	412	416	420
Vmp (V)	38.65	38.88	39.02	39.25	39.48
Imp (A)	10.48	10.52	10.56	10.60	10.64
Voc (V)	46.28	46.40	46.59	46.80	47.01
Isc (A)	11.09	11.13	11.17	11.21	11.25
Tolerance (%)	Pmax: ±3% Binning: ±5W Voc: ±5% Isc: ±5%				
NOCT (°C)	44 ±2				

NOCT: Conditions: Irradiance 800W/m<sup>2</sup>, ambient temperature 20°C, wind speed 1m/s

## Mechanical Characteristics

Number of cells	144pcs
Size of cell (mm)	182*91
Type of cell	Mono
Thickness of glass (mm)	3.2
Type of frame	Anodized aluminum alloy
Junction box	IP68
Size of module (mm)	2278*1134*30
Weight (kg)	27
Cables/connectors	62930 IEC 131, 1*4mm/E Ging : E1-X, QC Solar : QC4.10-cd, Zerun : Z4S, Renhe : RHC2xyzu
Length of Cabel	Portrait: +300mm/-300mm
Fire class	Class C

## Maximum Ratings

Operating Temperature(°C)	-40~85
Operating humidity(°C)	5~85
Allowable Hail Load	25mm ice-ball with velocity of 23m/s

Revised in March 2023 1st Edition

CAUTION: All rights and explain reserved by EGING PV.  
Specifications included in this datasheet are subject to change without notice.  
Made in China  
Changzhou EGing Photovoltaic Technology Co., Ltd



Tel: 86-519-82585880  
Zip: 213213  
Add: No.18, Jinwu Road, Jintan Dist,  
Changzhou City, Jiangsu Province.  
Email: marketing@egingpv.com  
Web: www.egingpv.com