

STAR Pro⁺ SERIES N-TOPCon 132-cell MODULE BIFACIAL

EG-615NT66-HRc/BF-DG

595~615W

0~3% POSITIVE TOLERANCE

KEY FEATURES



SMBB cell design
Super multi Busbar cells brings lower resistance and increased Busbar reflectance ensures higher power output



Low degradation
Adopt N-Type TOPCon cell technology, lower degradation and better temperature co-efficiency, greatly increased on generation performance



Excellent Low-light Performance
Advanced solar cell and glass surface texturing technology allows for excellent performance in low-light environments




PID Resistant
Excellent PID resistance performance optimized by unique structural design



Lower LCOE
Super lower LCOE

LINEAR PERFORMANCE WARRANTY


 15 Year Product Warranty  30 Year Linear Power Warranty

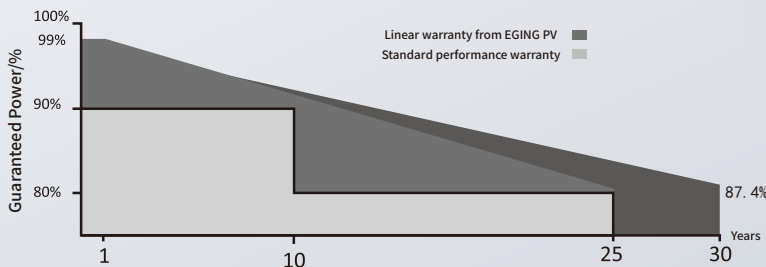



As a BloombergNEF Tier 1 and global leading manufacturer since 1998, EGING PV is committed to supplying reliable and durable PV products to customers to create together a greener planet.

EG-615NT66-HRc/BF-DG

Engineering Drawings

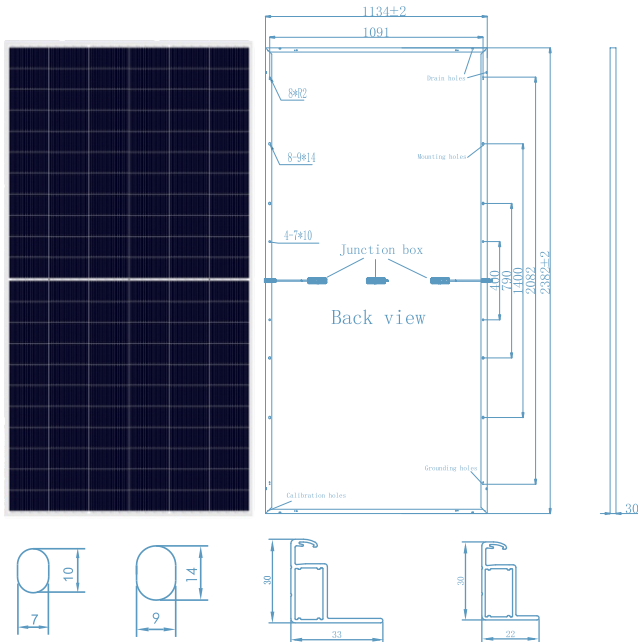

I-V Curves

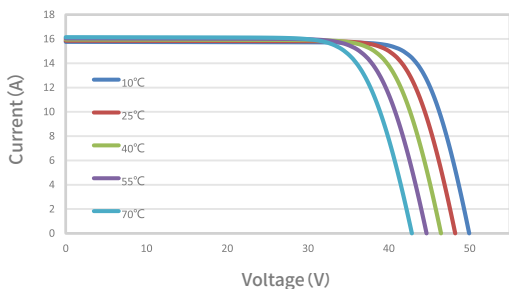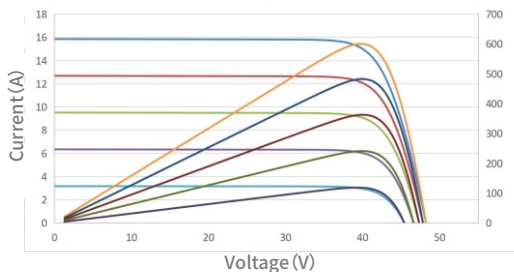

Packing Configuration

Pieces per pallet	36
Size of packing (mm)	2395*1130*1255
Weight of packing (kg)	1249
Pieces per container	720
Size of container	40'HC

Electrical Characteristics

Power level	595	600	605	610	615
Pmax (W)	595	600	605	610	615
Vmp (V)	40.05	40.22	40.39	40.56	40.73
Imp (A)	14.86	14.92	14.98	15.04	15.10
Voc (V)	48.09	48.30	48.52	48.74	48.96
Isc (A)	15.77	15.82	15.88	15.93	15.99
Module efficiency (%)	22.0	22.2	22.4	22.6	22.8
Maximum system voltage (V)	1500				
Fuse Rating (A)	35				
Temperature coefficient Pmax (%/°C)	-0.29				
Temperature coefficient Isc (%/°C)	0.046				
Temperature coefficient Voc (%/°C)	-0.24				

STC: Irradiance 1000W/m², module temperature 25°C, AM=1.5

Bifacial Output-Backside Power Gain

	Pmax(W)	655	660	666	671	677
10%	Module efficiency (%)	24.3	24.4	24.7	24.8	25.1
20%	Pmax(W)	714	720	726	732	738
	Module efficiency (%)	26.4	26.7	26.9	27.1	27.3

Working Characteristics

Power level	595	600	605	610	615
Pmax (W)	452	456	459	463	467
Vmp (V)	37.40	37.60	37.70	37.90	38.10
Imp (A)	12.07	12.12	12.16	12.20	12.25
Voc (V)	45.50	45.70	45.90	46.10	46.30
Isc (A)	12.71	12.75	12.80	12.84	12.89
Power tolerance (%)	0~+3				
NOCT (°C)	44±2				

NOCT: Conditions: Irradiance 800W/m², ambient temperature 20°C, wind speed 1m/s

Mechanical Characteristics

Number of cells	132pcs
Size of cell (mm)	182*105
Type of cell	N-type Mono
Thickness of glass (mm)	2.0
Type of frame	Anodized aluminum alloy
Junction box	IP68
Size of module (mm)	2382*1134*30
Weight (kg)	33.3
Cables/connectors	4mm ² , MC4 compatible
Length of Cabel	Portrait: +300mm/-300mm

Maximum Ratings

Operating Temperature(°C)	-40~85
Operating humidity(°C)	5~85
Allowable Hail Load	25mm ice-ball with velocity of 23m/s



Tel: 86-519-82585880
 Zip: 213213
 Add: No.18, Jinwu Road, Jintan Dist, Changzhou City, Jiangsu Province.
 Email: marketing@egingpv.com
 Web: www.egingpv.com

Revised in March 2024 1st Edition

CAUTION: All rights and explain reserved by EGING PV.
 Specifications included in this datasheet are subject to change without notice.
 The specific content of the product warranty refers to EGING's latest warranty.