

# AURORA Pro SERIES N-TOPCon 132-cell MODULE BIFACIAL

## EG-710NT66-HU/BF-DG

### 690~710W

0~3% POSITIVE TOLERANCE

### KEY FEATURES



**SMBB cell design**  
Super multi Busbar cells brings lower resistance and increased Busbar reflectance ensures higher power output



**Low degradation**  
Adopt N-Type TOPCon cell technology, lower degradation and better temperature co-efficiency, greatly increased on generation performance




**High Reliability**  
Strict in-house testing in PV Lab which is CNAS approved & TUV /VDE certified



**Excellent Low-light Performance**  
Advanced solar cell and glass surface texturing technology allows for excellent performance in low-light environments




**PID Resistant**  
Excellent PID resistance performance optimized by unique structural design

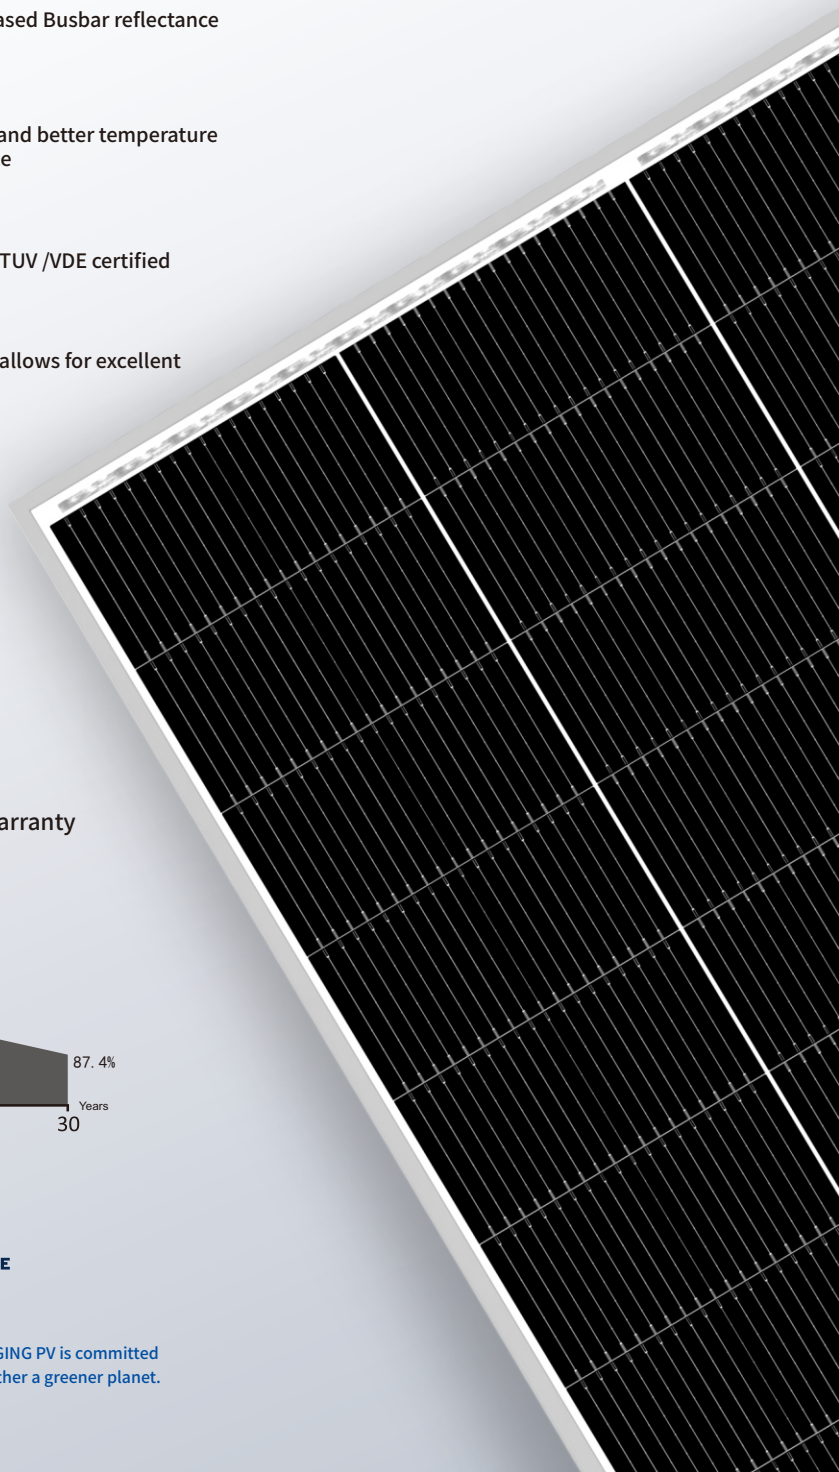

### LINEAR PERFORMANCE WARRANTY


**15** 15 Year Product Warranty    **30** 30 Year Linear Power Warranty

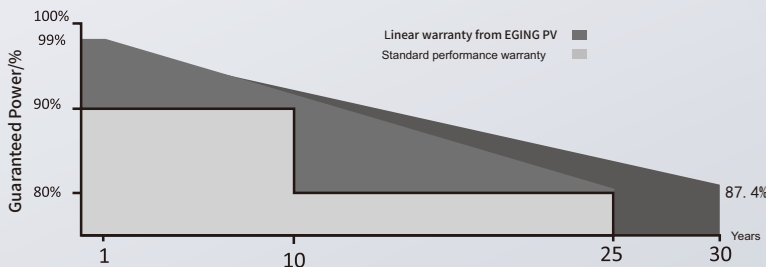

As a BloombergNEF Tier 1 and global leading manufacturer since 1998, EGING PV is committed to supplying reliable and durable PV products to customers to create together a greener planet.

# EG-710NT66-HU/BF-DG

## Engineering Drawings

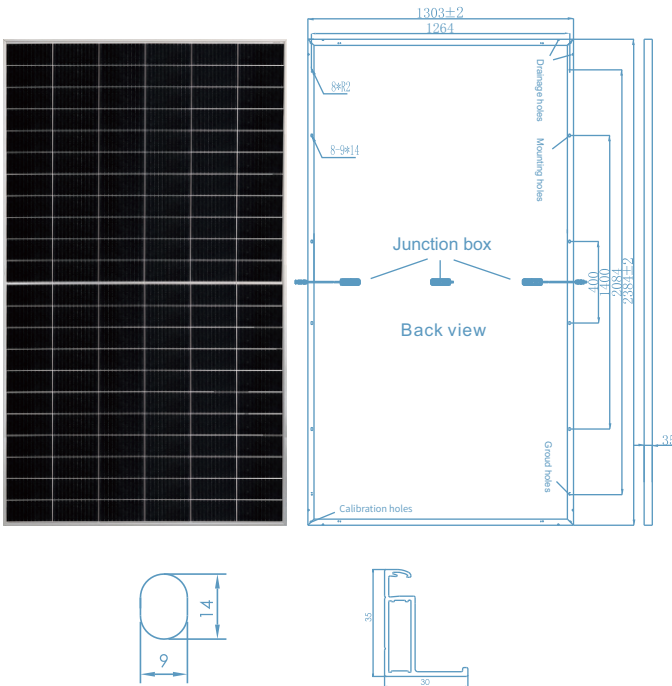

## Electrical Characteristics

Power level	690	695	700	705	710
Pmax (W)	690	695	700	705	710
Vmp (V)	40.05	40.27	40.47	40.66	40.86
Imp (A)	17.23	17.26	17.30	17.34	17.38
Voc (V)	47.84	48.05	48.25	48.46	48.68
Isc (A)	18.26	18.29	18.33	18.38	18.42
Module efficiency (%)	22.2	22.4	22.5	22.7	22.9
Maximum system voltage (V)	1500				
Fuse Rating (A)	30				
Temperature coefficient Pmax (%/°C)	-0.29				
Temperature coefficient Isc (%/°C)	0.04				
Temperature coefficient Voc (%/°C)	-0.24				

STC: Irradiance 1000W/m<sup>2</sup>, module temperature 25°C, AM=1.5

### Bifacial Output-Backside Power Gain



	Pmax(W)	759	765	770	776	781
10%	Module efficiency (%)	24.4	24.6	24.8	25.0	25.1
20%	Pmax(W)	828	834	840	846	852
	Module efficiency (%)	26.7	26.9	27.0	27.2	27.4

## Working Characteristics

Power level	690	695	700	705	710
Pmax (W)	523	527	531	534	538
Vmp (V)	37.40	37.60	37.70	37.90	38.10
Imp (A)	14.00	14.03	14.06	14.10	14.13
Voc (V)	45.20	45.40	45.60	45.80	46.00
Isc (A)	14.72	14.74	14.77	14.81	14.85
Power tolerance (%)	0~+3				
NOCT (°C)	44±2				

NOCT: Conditions: Irradiance 800W/m<sup>2</sup>, ambient temperature 20°C, wind speed 1m/s

## I-V Curves



## Packing Configuration

Pieces per pallet	31
Size of packing (mm)	1350*1130*2515
Weight of packing (kg)	1235
Pieces per container	558
Size of container	40' HC

## Mechanical Characteristics

Number of cells	132pcs
Size of cell (mm)	210*105
Type of cell	N-type Mono
Thickness of glass (mm)	2.0
Type of frame	Anodized aluminum alloy
Junction box	IP68
Size of module (mm)	2384*1303*35
Weight (kg)	38.3
Cables/connectors	4mm <sup>2</sup> , MC4 compatible
Length of Cabel	Portrait: +300mm/-300mm

## Maximum Ratings

Operating Temperature(°C)	-40~85
Operating humidity(°C)	5~85
Allowable Hail Load	25mm ice-ball with velocity of 23m/s

Revised in December 2023 1st Edition

CAUTION: All rights and explain reserved by EGING PV.  
Specifications included in this datasheet are subject to change without notice.  
The specific content of the product warranty refers to EGING's latest warranty.



Tel: 86-519-82585880  
Zip: 213213  
Add: No.18, Jinwu Road, Jintan Dist,  
Changzhou City, Jiangsu Province.  
Email: marketing@egingpv.com  
Web: www.egingpv.com