

AURORA Pro⁺ SERIES

N-TOPCon
132-cell MODULE BIFACIAL

EG-NT66-HRc/BF-DG

610~640W

0~3% POSITIVE TOLERANCE

KEY FEATURES



SMBB cell design

Super multi Busbar cells bring lower resistance and increased Busbar reflectance ensures higher power output



Low degradation

Adopt N-Type TOPCon cell technology, lower degradation and better temperature co-efficiency, greatly increased on generation performance



Excellent Low-light Performance

Advanced solar cell and glass surface texturing technology allows for excellent performance in low-light environments



PID Resistant

Excellent PID resistance performance optimized by unique structural design




Lower LCOE

Super lower LCOE

LINEAR PERFORMANCE WARRANTY


15 15 Year Product Warranty **30** 30 Year Linear Power Warranty

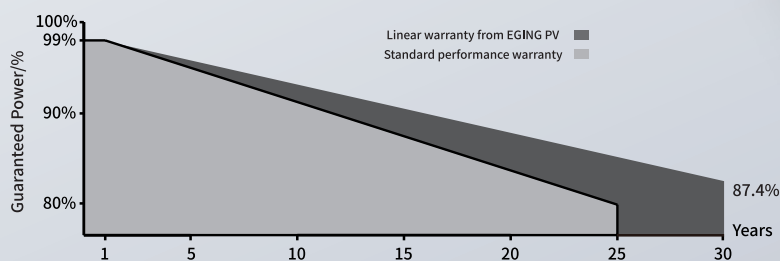



As a BloombergNEF Tier 1 and global leading manufacturer since 1998, EGING PV is committed to supplying reliable and durable PV products to customers to create together a greener planet.

EG-NT66-HRc/BF-DG

Engineering Drawings

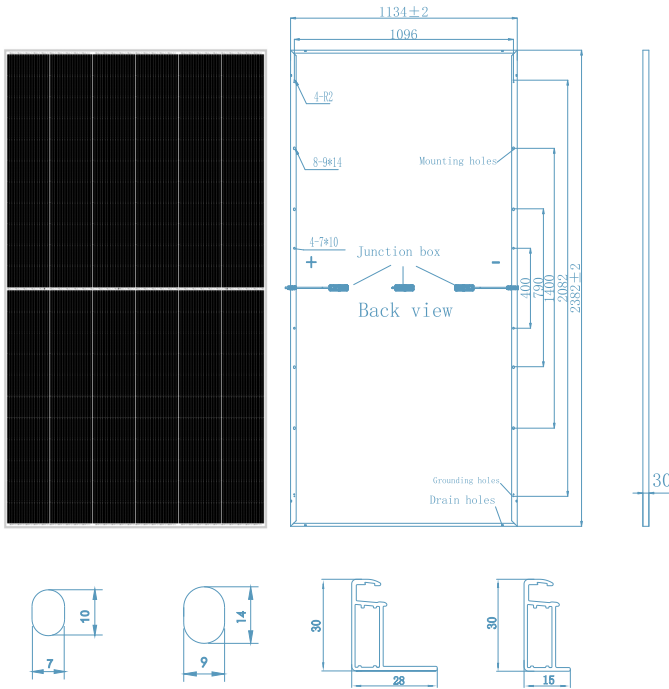

I-V Curves(620W)

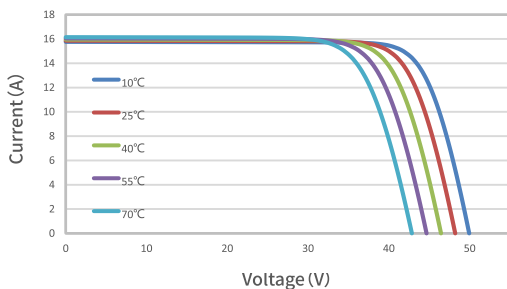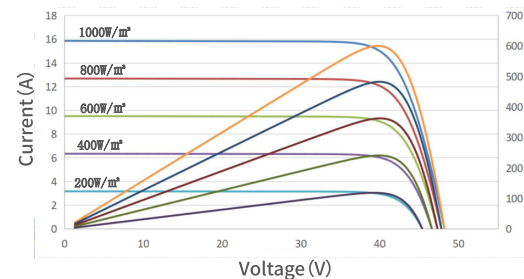

Packing Configuration

Pieces per pallet	36
Size of packing (mm)	2395*1135*1255
Weight of packing (kg)	1249
Pieces per container	720
Size of container	40'HC

Electrical Characteristics(STC)

Power level	610	615	620	625	630	635	640
Pmax (W)	610	615	620	625	630	635	640
Vmp (V)	40.56	40.73	40.90	41.07	41.26	41.43	41.59
Imp (A)	15.04	15.10	15.16	15.22	15.27	15.33	15.39
Voc (V)	48.74	48.96	49.13	49.32	49.53	49.71	49.87
Isc (A)	15.93	15.99	16.05	16.11	16.16	16.22	16.28
Module efficiency (%)	22.6	22.8	23.0	23.1	23.3	23.5	23.7
Maximum system voltage (V)	1500						
Fuse Rating (A)	35						
Temperature coefficient Pmax (%/°C)	-0.29						
Temperature coefficient Isc (%/°C)	0.046						
Temperature coefficient Voc (%/°C)	-0.24						

STC: Irradiance 1000W/m², module temperature 25°C, AM=1.5

Bifacial Output-Backside Power Gain

10%	Pmax(W)	671	677	682	688	693	699	704
	Module efficiency (%)	24.8	25.1	25.2	25.5	25.7	25.9	26.1
20%	Pmax(W)	732	738	744	750	756	762	768
	Module efficiency (%)	27.1	27.3	27.5	27.8	28.0	28.2	28.4

Working Characteristics(NOCT)

Power level	610	615	620	625	630	635	640
Pmax (W)	463	467	470	474	478	481	485
Vmp (V)	37.90	38.10	38.25	38.42	38.59	38.74	38.90
Imp (A)	12.20	12.25	12.29	12.33	12.38	12.43	12.47
Voc (V)	46.10	46.30	46.45	46.60	46.79	46.98	47.13
Isc (A)	12.84	12.89	12.94	12.99	13.03	13.07	13.14
Power tolerance (%)	0~+3						
NOCT (°C)	44±2						

NOCT: Conditions: Irradiance 800W/m², ambient temperature 20°C, wind speed 1m/s

Working Characteristics (BNPI)

Pmax (W)	675	681	687	693	698	704	709
Voc (V)	48.75	48.98	49.15	49.33	49.55	49.72	49.87
Isc (A)	17.65	17.71	17.79	17.85	17.91	17.97	18.04
Tolerance (%)	Pmax: ±3% Binning: ±5W Voc: ±5% Isc: ±5%						

BNPI: Front Irradiance 1000W/m², Rear Irradiance 135W/m², module temperature 25°C, AM=1.5

Bifaciality: Pmax 80%±10%, ΦVoc 98%±2%, ΦIsc 80%±10%

Mechanical Characteristics

Number of cells	132pcs
Size of cell (mm)	182.2*105
Type of cell	N-type Mono
Thickness of glass (mm)	2.0
Type of frame	Anodized aluminum alloy
Junction box	IP68
Size of module (mm)	2382*1134*30
Weight (kg)	33.3
Cables/connectors	4mm², MC4 compatible
Length of Cable	Portrait: +300mm/-300mm

Maximum Ratings

Operating Temperature(°C)	-40~85
Operating humidity(%RH)	5~85
Allowable Hail Load	25mm ice-ball with velocity of 23m/s

Revised in August 2025 1st Edition*

CAUTION: All rights and explain reserved by EGING PV.

Specifications included in this datasheet are subject to change without notice.

The specific content of the product warranty refers to EGING's latest warranty.



Tel: 86-519-82585880

Zip: 213213

Add: No.18, Jinwu Road, Jintan Dist,

Changzhou City, Jiangsu Province.

Email: marketing@egingpv.com

Web: www.egingpv.com