

STAR SERIES MONO PERC 144-cell MODULE BIFACIAL

EG-560M72-HL/BF-DG

540~560W

0~3% POSITIVE TOLERANCE

KEY FEATURES



Mbb cell design
Multi Busbar cells brings lower resistance and increased Busbar reflectance ensures higher power output



Low degradation
All single crystal cells are produced by using gallium-doped silicon wafer, which has better anti-degradation ability and ensures durable and stable efficient power generation



High Reliability
Strict in-house testing in PV Lab which is CNAS approved & TUV /VDE certified




Excellent Low-light Performance
Advanced solar cell and glass surface texturing technology allows for excellent performance in low-light environments



PID Resistant
Excellent PID resistance performance optimized by unique structural design

LINEAR PERFORMANCE WARRANTY


 12 Year Product Warranty  30 Year Linear Power Warranty

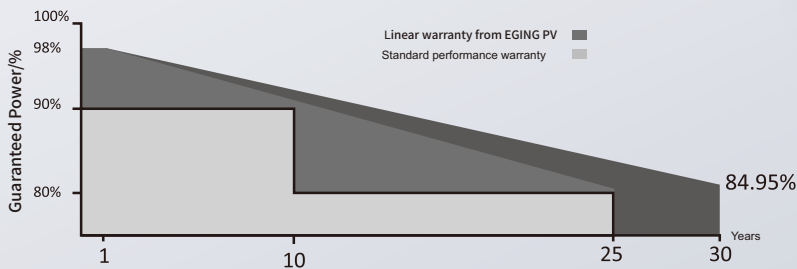


As a BloombergNEF Tier 1 and global leading manufacturer since 1998, EGING PV is committed to supplying reliable and durable PV products to customers to create together a greener planet.

EG-560M72-HL/BF-DG

Engineering Drawings

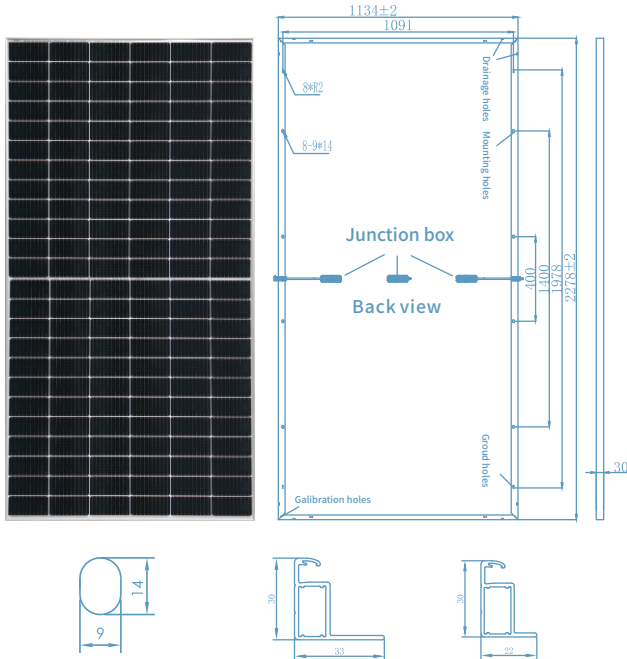

I-V Curves

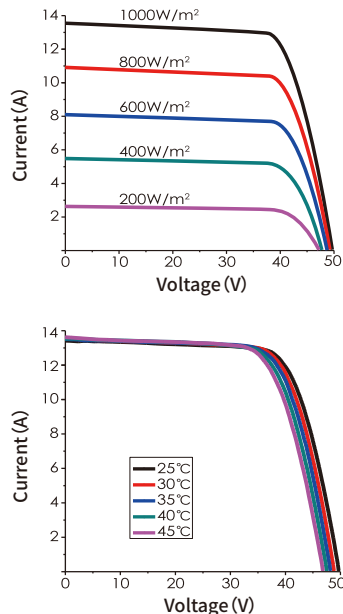

Packing Configuration

Pieces per pallet	36
Size of packing (mm)	2320*1135*1255
Weight of packing (kg)	1186
Pieces per container	720
Size of container	40' HC

Electrical Characteristics

Power level	540	545	550	555	560
Pmax (W)	540	545	550	555	560
Vmp (V)	42.09	42.32	42.54	42.76	42.98
Imp (A)	12.83	12.88	12.93	12.98	13.03
Voc (V)	49.91	50.12	50.34	50.55	50.72
Isc (A)	13.58	13.63	13.68	13.73	13.78
Module efficiency (%)	20.90	21.09	21.29	21.48	21.68
Maximum system voltage (V)	1500				
Fuse Rating (A)	25				
Temperature coefficient Pmax (%/°C)	-0.350				
Temperature coefficient Isc (%/°C)	0.05				
Temperature coefficient Voc (%/°C)	-0.275				

STC: Irradiance 1000W/m², module temperature 25°C, AM=1.5

Bifacial Output-Backside Power Gain

	Pmax(W)	594	599	605	611	616
10%	Module efficiency (%)	22.99	23.18	23.42	23.65	23.85
	Pmax(W)	648	654	660	666	672
20%	Module efficiency (%)	25.08	25.31	25.54	25.78	26.01

Working Characteristics

Power level	540	545	550	555	560
Pmax (W)	409	412	416	420	424
Vmp (V)	38.96	39.13	39.32	39.55	39.78
Imp (A)	10.50	10.53	10.58	10.62	10.66
Voc (V)	46.42	46.61	46.82	47.01	47.24
Isc (A)	11.11	11.16	11.20	11.24	11.30
Power tolerance (%)	0~+3				
NOCT (°C)	44±2				

NOCT: Conditions: Irradiance 800W/m², ambient temperature 20°C, wind speed 1m/s

Mechanical Characteristics

Number of cells	144pcs
Size of cell (mm)	182*91
Type of cell	Mono
Thickness of glass (mm)	2.0
Type of frame	Anodized aluminum alloy
Junction box	IP68
Size of module (mm)	2278*1134*30
Weight (kg)	31.7
Cables/connectors	4mm², MC4 compatible
Length of Cabel	Portrait: +300mm/-300mm

Maximum Ratings

Operating Temperature(°C)	-40~85
Operating humidity(°C)	5~85
Allowable Hail Load	25mm ice-ball with velocity of 23m/s



Tel: 86-519-82585880
 Zip: 213213
 Add: No.18, Jinwu Road, Jintan Dist, Changzhou City, Jiangsu Province.
 Email: marketing@egingpv.com
 Web: www.egingpv.com

Revised in March 2024 1st Edition

CAUTION: All rights and explain reserved by EGING PV.
 Specifications included in this datasheet are subject to change without notice.
 The specific content of the product warranty refers to EGING's latest warranty.